

# Thermia® CF22

## Design and comfort for everyone

SERIES FEATURES	
Thermal break	No
Main frame	35 mm
Main leaf	22 mm
General thickness of the profiles	1.2 mm
Maximum glazing	8 mm / 15 mm
Maximum leaf weight	80 Kg
Track option	2 tracks
90° frameless "KISS" closure solution	No
Available profiles	Window / Door



### ACOUSTICS



Estimated sound attenuation up to **Rw 33 dB**.  
Window size: 1.23 m x 1.45 m with acoustic laminated glass of 6.6

### TEST RESULTS

-  Air permeability **2**
-  Watertightness **4A**
-  Wind resistance **C2**

Results of official tests performed on Applus® 15/10169-752 and on the basis of Annex E of standard EN-14351-1:2006

### CROSS-SECTION

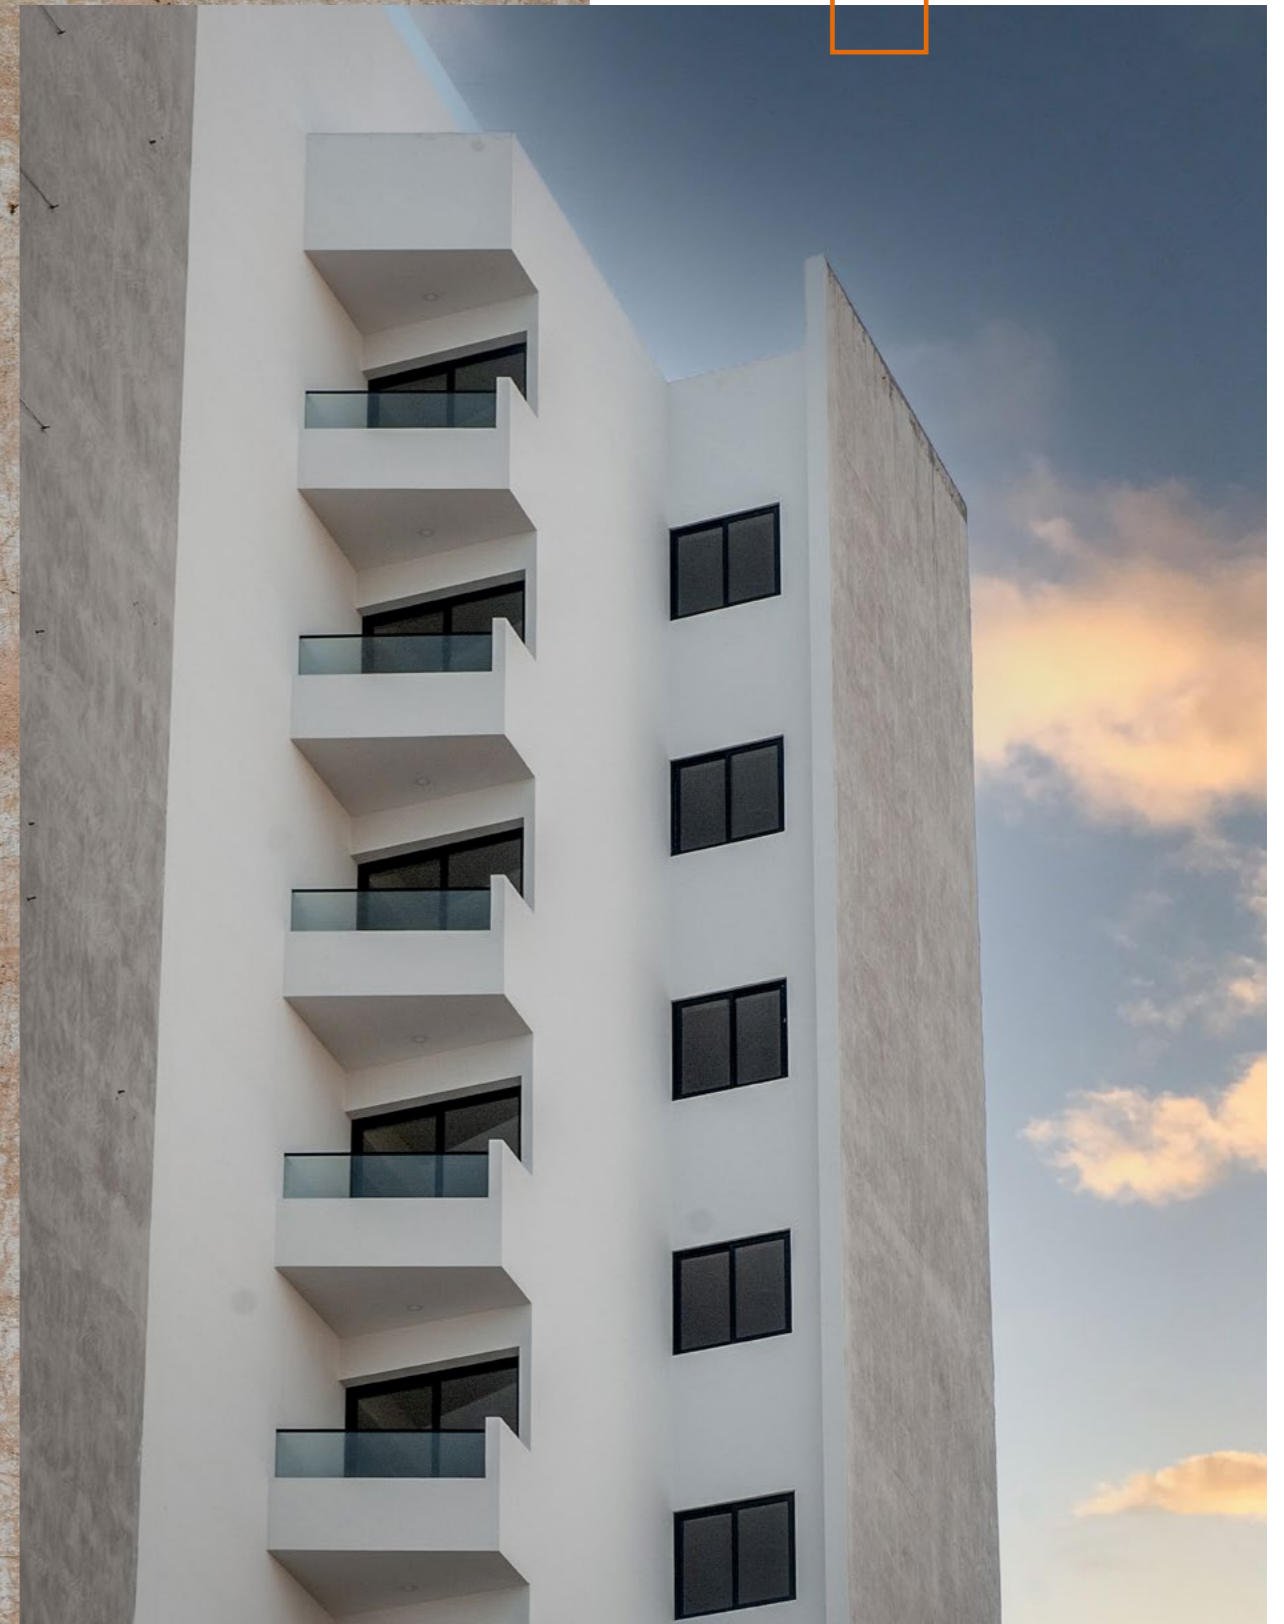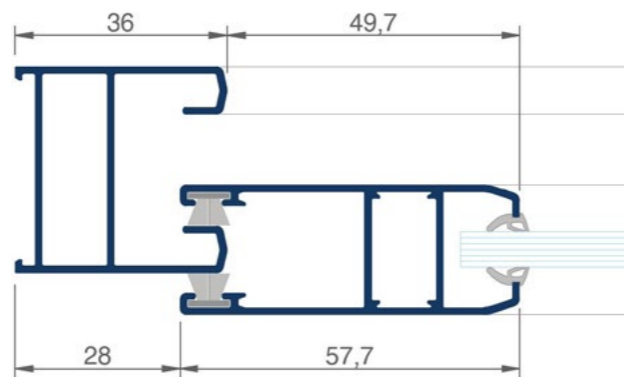

Quality seals



Qualanod seal for anodization  
License number: 1014



Qualicoat seal for lacquer  
License number: 405



Qualideco seal for the imitation wood  
License number: ES-0009F

Certification



THERMIA BARCELONA  
EN14351-1:2006+A2:2016