

## ENERGY EFFICIENCY

Estimated acoustic performance up to Rw 33dB

Window size: 1.23m x 1.45m with acoustic laminated glass of 4+4.1A/  
CAM/4+4.1A

## TEST RESULTS

Protection against meteorological agents



Air permeability: **2**

Water tightness: **4A**

Wind resistance: **C2**

Results of official tests performed on APPLUS 15/10169-752 and on the basis of Annex E of standard EN-14351 - 1:2006 + A2:2016.

## SIDE & CENTRAL CROSS-SECTION

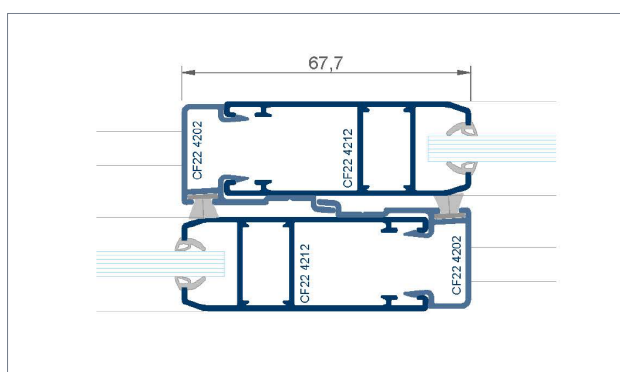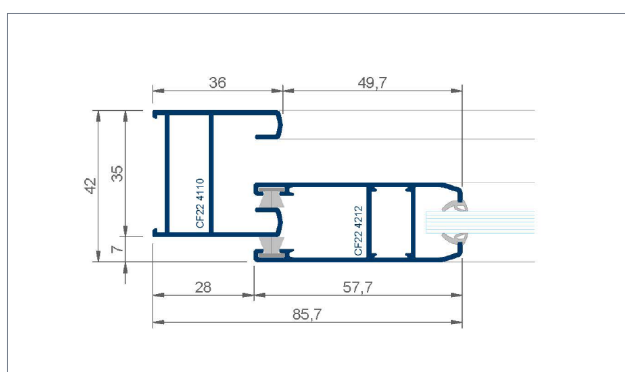

### FRAME

Width: 35mm (corte perimetral)

Thermal break: NO

Profile thickness: 1,2mm

Tracks: 2 carriles

### SASH

Width: 22mm

Thermal break: NO

Profile thickness: 1,2mm

Hoja ajunquillada: NO

Glass thickness: 4mm mín / 8mm máx.

Maximum weight per leaf: 80 Kg

Maximum permitted dimensions:

Consult at technical office

Possibility of leaf reinforcement

### HERRAJES

Mortise closure

### GASKETS AND SEALING

Perimetral and central cross

### OPENING POSSIBILITIES

Sliding 2 rails

### STRUCTURES

Windows

Balcony

All components of the **Thermia CF22** system have their origin in the European Union.

### ALLOY

6063 T-5 / 6060 T-5

### LABORATORIOS



### SURFACE FINISHES

Color powder coating in accordance with the QUALICOAT

European certification >60 micras

Available with SEASIDE quality

Wood effect powder coating in accordance with the QUALI-DECO European certification

Anodized in accordance with the QUALANOD European

certification > 15 microns available in 20 and 25 microns

