

ENERGY EFFICIENCY

Estimated acoustic performance up to Rw 39dB
Window size: 1.23m x 1.45m with acoustic laminated glass of 4+4.1A/
CAM/4+4.1A

TEST RESULTS

Protection against meteorological agents



Air permeability: **2**

Water tightness: **Window 6A - Balcony 7A**

Wind resistance: **Window C5 - Balcony C2**

Results of official tests performed on ENSATEC 244728 y 243212 and on the basis of Annex E of standard EN-14351-1:2006 + A2:2016.

SIDE & CENTRAL CROSS-SECTION

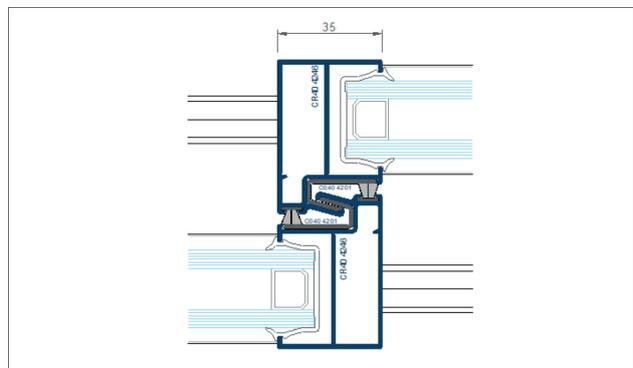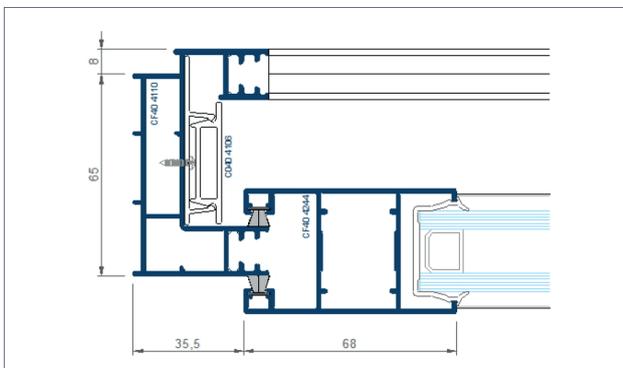

FRAME

Width: 65mm (corte perimetral)

Thermal break: NO

Profile thickness: 1,4mm/1,6mm

Tracks: 2, 3 or more rails

SASH

Width: 22mm (corte recto)

Thermal break: NO

Profile thickness: 1,4mm / 1,6mm

Hoja ajunquillada: NO

Glass thickness: 4mm mín/28mm máx.

Maximum weight per leaf: 200 Kg

Maximum permitted dimensions:

Consult at technical office

Possibility of leaf reinforcement

HERRAJES

Multipoint closure: 1, 2, 3, 4 and 5 points

Multipoint lock with key

1 point lock

GASKETS AND SEALING

Perimetral and central cross

OPENING POSSIBILITIES

Sliding 2, 3 and more rails

90° closing without vertical post

Pocket 1, 2 and 3 sheets

STRUCTURES

Windows

Balcony

All components of the **Thermia CF40 VERSIA** system have their origin in the European Union.

ALLOY

6063 T-5 / 6060 T-5

LABORATORIOS



SURFACE FINISHES

Color powder coating in accordance with the QUALICOAT

European certification >60 micras

Available with SEASIDE quality

Wood effect powder coating in accordance with the QUALI-DECO European certification

Anodized in accordance with the QUALANOD European

certification > 15 microns available in 20 and 25 microns

